




DATE: TAG:
 JOB:
 PROJECT:
 COMPANY:
 SALES PERSON:

vPlume - VNN
 WITHOUT PLENUM BOX

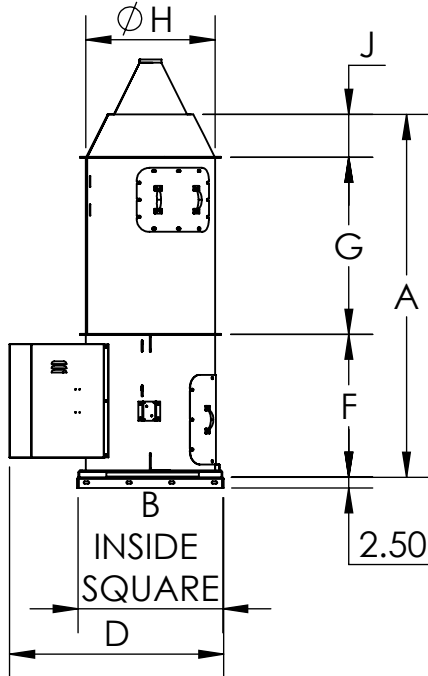

All dimensions are in inches.
 A = Overall system height (without curb)
 B = Width of Curb
 D = Overall width of the system
 F = Height of fan
 G = Height of stack extension
 H = Housing Outer Diameter
 J = Height of stationary nozzle

*Weight do not include motor and drive

DIMENSIONAL & WEIGHT DATA

MODEL	A	B	D	F	G	H	J	WEIGHT*(LBS)
90	122	21 1/2	40 3/4	27 1/4	84 3/4	18 1/2	10	634
105	122	21 1/2	40 3/4	27 1/4	84 3/4	18 1/2	10	640
122	122	21 1/2	40 3/4	27 1/4	84 3/4	18 1/2	10	646
135	122	23 1/2	42 3/4	29 1/4	82 1/4	20 1/2	10	702
150	122	25 1/2	44 3/4	31 1/4	80 3/4	22 1/2	10	757
165	122	27 1/2	46 3/4	31 1/2	80 1/2	25	10	824
182	122	33 1/2	52 3/4	33 1/2	78 1/2	30 1/4	10	999
200	122	35 1/2	58 1/4	35	77	33 1/4	10	1058
222	122	39 1/2	62 1/4	39	73	36 3/4	10	1085
245	122	45 1/2	71	43	69	40 3/4	10	1316
270	122	49 1/2	75	47 1/2	64 1/2	44 3/4	10	1537
300	122	58 1/4	85 3/4	53	59	49 3/4	10	1786
330	122	60	89 1/2	59 1/2	52 1/2	49 1/4	10	2014
365	122	63	92 1/2	66	46	54 3/4	10	2397
402	122	70	99 1/2	73	39	60 1/4	10	2756

STANDARD CONSTRUCTION FEATURES

- Stainless Steel Shaft
- Bolted Access Door
- Weather Cover
- Air Dry Phenolic Coat with UV (Gray)
- Fan Drain
- Stainless Steel Hardware
- Ceramic Shaft Seal
- Aluminum Non-Overloading Wheel
- AMCA B
- L10/100K Concentric Bearings
- Nylon Lube Line
- UL/cUL 705 Certified
- AMCA Certified for Air & Sound
- Variable Nested Nozzle (VNN)
- Designed to Withstand 125 mph Wind

ACCESSORIES

- NEMA 3R Disconnect Switch
- VFD (Shipped Loose)
- Piezo Ring:
 - With Transducer
 - Without Transducer
- 2.0 Service Factor Drives
- Roof Curb

REVISION:

FORM:

REPLACES: