


DATE: JOB: PROJECT: COMPANY: SALES PERSON:

TAG:

PRD-DD (DOWNBLAST CENTRIFUGAL FAN) POWER ROOF VENTILATOR - DIRECT DRIVE

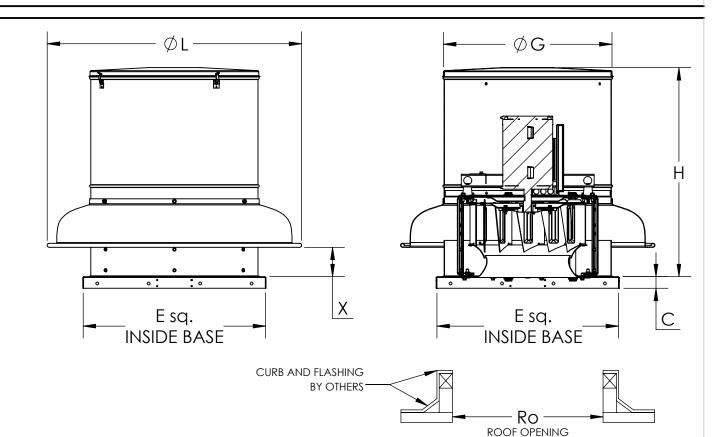

Standard Construction

- 1) Backward Inclined Alum Wheel
- 2) Alum housing with Curb Cap
- 3) Galvanized motor structure with lifting lug
- 4) Drain Spout
- 5) Bird Screen

Options & Accessories

- 1) Floating hinge kit
- 2) Hinge sub-base
- 3) Pedestal (Vented & Non-Vented)
- 4) Bird screen/Outlet Guard 5) Back Draft & Control Damper

FIELD BUILT CURB DETAIL

- 7) Coatings
- 8) Disconnect Switch
- 9) Insect Screen

6) Curb Adaptor

DIMENSIONAL DATA

SIZES	PARTIAL WIDTH 'X'												G		_		_		D.	MAX MTR	MAX	MAX
	110%	10	100%		0%	50%		30%		L	Н		G		E		С		Ro	FRAME	RPM	WT. (lbs)
060	-	2			-	-		-	25	1/4	21	1/2	16	1/4	17	1/8	1 13/16	9	1/2	48	1750	36
070	-	2			-	-		-	25	1/4	21	1/2	16	1/4	17	1/8	1 13/16	9	1/2	48	1750	37
080	-	2			-	-		-	25	1/4	21	1/2	16	1/4	17	1/8	1 13/16	9	1/2	48	1750	38
100	-	2			-	-		-	25	1/4	21	1/2	16	1/4	17	1/8	1 13/16	9	1/2	48	1750	35
122	-	2	1/2		-	-		-	30	1/4	24	1/2	19	3/4	21		1 13/16	13	1/2	48	1845	45
135	-	3	5/16	2	3/8	-		-	30	1/4	25	5/16	19	3/4	21		1 13/16	13	1/2	48	1750	46
150	-	3	3/4	2 1	1/16	-		-	33	1/4	26	1/4	21	7/8	23	3/8	1 13/16	16		1 45T	1845	53
165	4 3/4	4	3/16	3	1/16	1 1/	4	-	36	1/4	29		24	1/8	25	5/8	1 13/16	18		1.45T	1805	62
182	5 1/4	4	5/8	3	5/16	1 7/	16	-	39	3/4	32	9/16	26	5/8	28	3/8	1 13/16	21		184T	1565	72
200	5 11/16	5		3	9/16	1 1/	2	-	43	1/4	33	13/16	29	1/8	31	1/8	1 13/16	23	1/2	184T	1325	90
222	6 1/2	5	3/4	4	3/16	1 13/	16	-	47	3/4	35	7/8	32	1/4	34	9/16	1 13/16	27	1/2	184T	1250	105
245	7	7	1/8	5	3/8	2 13/	16	1 1/16	47	3/4	37	5/16	32	1/4	34	9/16	1 13/16	27	1/2	184T	1175	118
270	8 13/16	7	7/8	5 1	5/16	3 1/	8	1 1/4	52	3/8	39	3/4	35	1/2	38	1/4	1 13/16	31		215T	1103	135
300	9 13/16	8	3/4	6	5/8	3 1/	2	1 3/8	57	3/4	41	3/4	39	3/8	42	1/2	1 13/16	35		215T	1030	160

ALL DIMENSIONS ARE IN INCHES, WEIGHTS ARE APPROXIMATE AND DOES NOT INCLUDE DRIVES OR ACCESSORIES.

REVISION: FORM: REPLACES: