



GBD Series Exhaust Blower Grease Duct Installation



Grease Duct Installation Procedure

1. Loosen hinge bolts securing blower to base. Lift blower off base. Set base on roof curb.
2. Drop grease duct through opening in base. Flanges on duct will set on lip of base to hold duct in place.
3. Set blower on base and tighten bolts that secure hinges to base.

MODEL	A	B	C	D
GBD-125	34	31	20	27
GBD-150	34	31	20	27
GBD-182	40 1/2	37 1/2	19	33 1/2
GBD-222	40 1/2	37 1/2	19	33 1/2
GBD-245	47	44	19	40
GBD-270	53	50	19	46
GBD-300	65 1/2	62 1/2	19	58 1/2

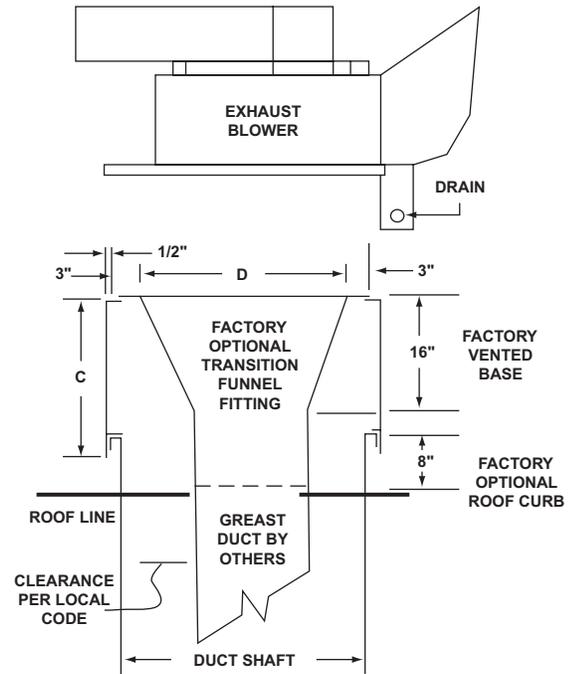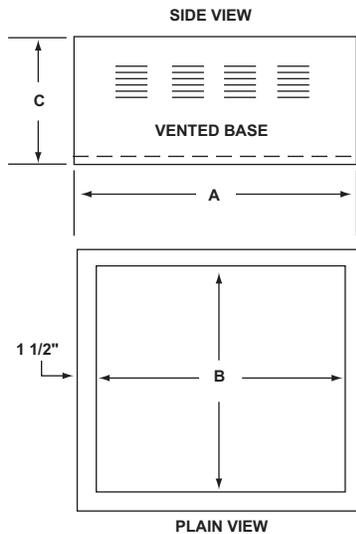


Side Inlet Fitting (Factory Option)

When Ordering...

1. Supply A and B dimensions for proper connection of the grease duct.
2. Supply C dimension that will allow proper horizontal duct run. Duct installation must conform with NFPA96 or local code requirements.

MAXIMUM DIMENSIONS		
MODEL	A	B
GBD-125	14	30 1/2
GBD-150	14	30 1/2
GBD-182	14	36 3/8
GBD-222	14	36 3/8
GBD-245	14	43 1/2
GBD-270	14	49 1/2
GBD-300	14	61 7/8

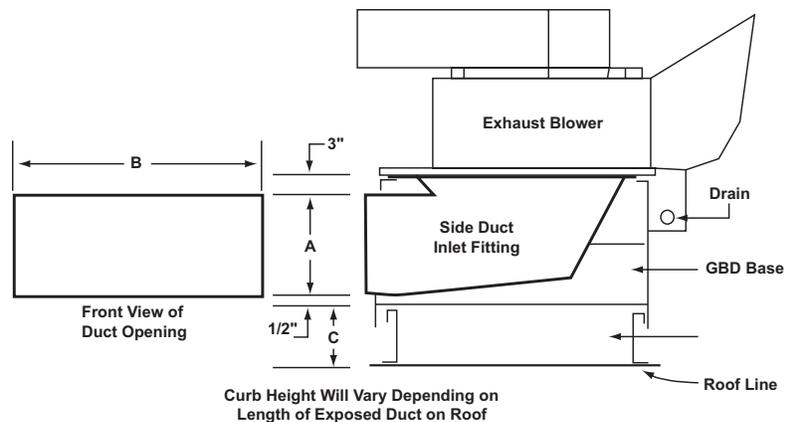

Drawing No. **GBD-6003** Date: **02/06**